



# Choteau Public School


## Elementary & Middle School Addition & Remodel

**Total Cost:**  
\$1,411,450

**Area:**  
18,600 s.f.

**Client:**  
Choteau Public School

**Location:**  
Choteau, MT

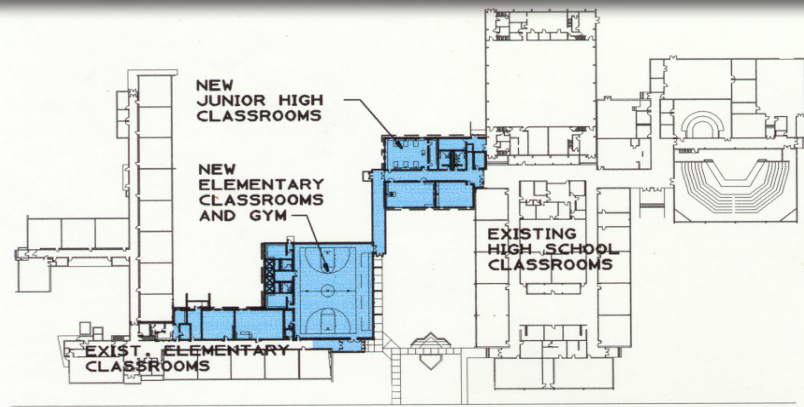

Phase I & II design services were provided to program, design, and administer the construction of the additions and remodeling for the Elementary and High School. Included were three Middle School classrooms, a gymnasium, locker rooms, and two Elementary classrooms.

Materials used in construction were concrete slab on grade, insulated concrete block walls (Integral Wall Systems) and wood and steel roof framing. The roofing material throughout is mechanically attached hypalon over rigid insulation.

In addition to the construction, we also oversaw the demolition of the three-story masonry High School located on the site where the Middle School classrooms are located.



*Architecture  
Matters*